

Fixed Lighting Appliance

Product & Technical Information

Sku:175534

Model: Dublin

Power Supply:230-240V A.C.50HZ

Lamp:B22 60W MAX

Use: Indoor

Safety Warnings

- Always read the instructions carefully before installation, failure to do this could result in either damage to the product or harm to the installer
- This product must be installed by a licenced electrician in accordance with the Australian/ New Zealand wiring rules AS/NZS 3000
- Do not exceed the maximum recommended lamp wattage and always ensure the lamp is correctly fitted into the lamp holder
- Do not cover this light fitting with any material
- Keep this product free from the possibility for any contact with water or other liquids
- Regularly inspect the light fitting to ensure that no damage has occurred. If damage has occurred cease use and replace

Replacing and Changing Lamps

Removal

- Ensure the power is off at the wall switch and the light is turned off.
- If the lamp has been recently used and needs replacing allow the lamp sufficient time to cool down before removing
- Unscrew (Edison Fitting) or Push and Twist (Bayonet Fitting) to remove the lamp

Replacing

- Check the replacement lamp does not exceed the maximum wattage for the lamp fitting
- Where possible try to keep any fingers off the new lamp during the fitting process. Particularly for Halogen lamps as oil residue from fingers can compromise the life of the lamp.
- Turn the switch on at the wall and the fitting to test.


12 month Guarantee

This product is covered by a 12 month guarantee against factory faults. If you wish to return this product to the place of purchase, we will gladly exchange the item or refund the purchase price. Proof of purchase must be provided.



Fixed Lighting Appliance

Instruction Diagram

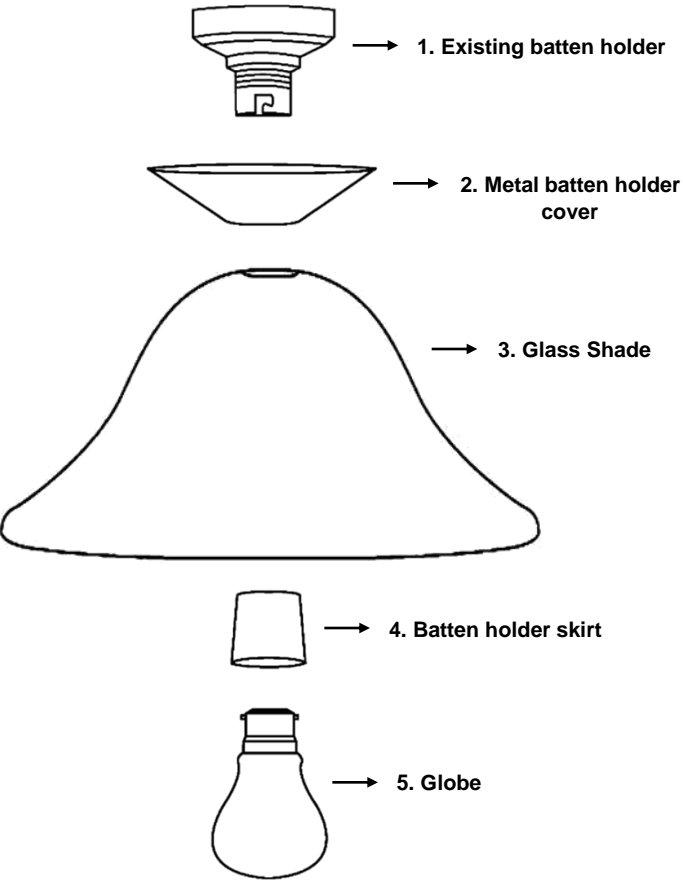

Instruction Description

Follow steps ABC and steps 1 through to 4:

Step A

- Ensure power to the circuit is isolated for the duration of the installation

Step B

1. Put the metal batten holder cover over the existing batten holder
2. Attach the glass shade
3. Tighten the batten holder skirt into place
4. Install the light bulb, which should not exceed the wattage specified on the lighting fixture

Step C

- Reconnect power to the unit. The light fitting should now be ready to test.